Yamaha R1 2007/2008/2009 – R6 2006/2007/2008 Plug&Play kit user manual









INDEX

Introduction	3
Chapter 1 – Plug&Play kit content	
1.1 – Part numbers	
Chapter 2 – Plug&Play kit installation	9
2.1 - Installation on Yamaha R1 2007/2008 - R6 2006/2007/2008	
2.2 - Installation on Yamaha R1 2009	10
Chapter 3 –MXL and Yamaha connectors pinout	11
3.1 - MXL & Yamaha R1 2007/08 - R6 2006/07/08 AMP connectors pinout	11
3.2 - MXL AMP and Yamaha R1 2009 JAE connectors pinout	12
Chapter 4 – First start up	13
Chapter 5 – Calibration, gear calculation, data download and analysis	
Chapter 6 – Error codes	16
Appendix – Wirings and pinout	



Presentation

AIM: a world leader in data acquisition for racing applications.

Established in 1976, AIM is now world leader in the production of high performances data loggers for racing applications: dashboards, data loggers, digital displays, lap timers.

AIM set new standards in various motor sports: from karts to bikes, Dragsters, Formula 1 Boat, Offshore and even snowboard!

AIM products merge the functionalities of traditional tachometers, RPM indicators, temperature, pressure and lap timer, with compact units, high performing and easy to use. Different product for different applications but with one shared characteristic: the great innovation.

Each AIM system is completely designed, realised and tested by its technicians. The research and development board includes electronic and mechanical engineers, physics and other specialists that develop firmware, software, hardware and the related documentation. Our reputation is build on quality products, innovative technology and on the steady engagement in customer support.



Introduction

MXL Plug&Play kit for Yamaha R1/R6 is the dashboard (with integrated data logger in Pista version) designed for an easy and quick installation: with the minimum effort it is possible to connect dire3ctly with the bike Engine Control Unit (ECU) and see (with no need of additional sensors):

- RPM
- Speed
- Engaged gear (calculated)
- Water temperature
- Air temperature
- Oil level
- fuel level
- Turning lights signal
- High beam signal
- Neutral signal
- Battery charge level

The logger, like the stock dash, is powered by the bike master switch.

MXL Strada, **Pista** kits for Yamaha have been developed for the following bike models:

Model	Year 2006	Year 2007	Year 2008	Year 2009
R1	•	✓	✓	✓
R6	✓	✓	✓	•

√ = supported

= not supported

Note: thanks to the infrared transmitter/receiver (included in **MXL Pista** kit, optional in **MXL Strada** one), it is possible to see/record lap times. Moreover **MXL Pista**, allows to manage and record data coming from 5 additional configurable channels (e.g. suspension potentiometer, throttle sensor, pressure sensor, brake, etc...).

For any additional information not explicitly explained in this tutorial refer to **MXL** and/or **Race Studio Configuration** user manuals.



Chapter 1 – Plug&Play kit content



Plug&Play kit content for Yamaha changes according on MXL model and on the bike year of production. In the image here below kit components are numbered for more clarity.

MXL Strada Plug&Play kit for Yamaha R1 2007/2008 and Yamaha R6 2006/2007/2008:

N.1 – MXL Strada (1);

N.1 – wiring for MXL Strada 12 pins AMP connector (2);

N.1 – Yamaha bracket kit (3) made up of:

n°1 – bracket:

n°3 - washers;

n°4 – M4*8 Phillips head screws;

n°3 – M5*18 Phillips head screws;

N.1 – USB Cable (4);

N.1 – Race Studio 2 Software Cd (5);

This user manual + MXL user manual (6).





MXL Pista Plug&Play kit for Yamaha R1 2007/2008 and Yamaha R6 2006/2007/2008:

- N.1 **MXL** Pista (1);
- N.1 Wiring for MXL Pista AMP 12 pins connector (2);
- N.1 Infrared receiver with 90cm cable (3);
- N.1 Infrared transmitter (4);
- N.1 Transmitter external power cable (5);
- N.1 Yamaha bracket kit (6) made up of:
 - n°1 bracket;
 - n°3 washers;
 - n°4 M4*8 Phillips head screws;
 - n°3 M5*18 Phillips head screws;
- N.1 USB Cable (7);
- N.1 Race Studio 2 Software Cd (8);

This user manual + MXL user manual (9).





MXL Strada Plug&Play kit for Yamaha R1 2009:

N.1 – MXL Strada (1);

N.1 – wiring for MXL Strada 12 pins AMP connector (2);

N.1 – Adapter cable for Yamaha R1 2009 (3);

N.1 – Yamaha bracket kit (4) made up of:

n°1 – bracket;

n°3 – washers;

n°4 – M4*8 Phillips head screws;

n°3 – M5*18 Phillips head screws;

N.1 – USB Cable (5);

N.1 - Race Studio 2 Software Cd (6);

This user manual + MXL user manual (7).





MXL Pista for Yamaha R1 2009 kit:

- N.1 **MXL Pista** (1);
- N.1 Wiring for MXL Pista AMP 12 pins connector (2);
- N.1 Adapter cable for Yamaha R1 2009 (3):
- N.1 Infrared receiver with 90cm cable (4);
- N.1 Infrared transmitter (5);
- N.1 Transmitter external power cable (6);
- N.1 Yamaha bracket kit (7) made up of:
 - n°1 bracket;
 - n°3 washers:
 - n°4 M4*8 Phillips head screws;
 - n°3 M5*18 Phillips head screws;
- N.1 USB Cable(8);
- N.1 Race Studio 2 Software CD (9);

This user manual + MXL user manual (10).



1.1 - Part numbers

Plug&Play kit MXL Strada for Yamaha R1 07/08 – R6 06/07/09: code X15MXLSYR105;

Plug&Play kit MXL Strada for Yamaha R1 09: code X15MXLSYR109:

Plug&Play kit MXL Pista for Yamaha R1 07/08 - R6 06/07/08: code X15MXLCYR105;

Plug&Play kit MXL Pista for Yamaha R1 09: code X15MXLCYR109.

MXL Strada/Pista for **Yamaha R1 2009 adapter cable** (to switch from a Yamaha R1 2007/2008 Plug&Play kit to a Yamaha R1 2009 Plug&Play kit): code **V02554720**.

Optional to all MXL Strada Yamaha kits:

Infrared receiver: code **X41RX12090**; Infrared transmitter: code **X02TXKMA01**;

Infrared transmitter power cable: **V02POWTX0**;

Spare parts

Braket kit for Yamaha R1 2007/2008 and Yamaha R6 2006/2007/2008: **DNKTSTMXLY**

Bracket kit for Yamaha R1 2009: DNKTSTMR109

Cable for 12 pin AMP connector for MXL Strada: V02.554.35 Cable for 12 pin AMP connector for MXL Pista: V02.554.34



Chapter 2 – Plug&Play kit installation

MXL Plug and Play kit for Yamaha R1/R6 is expressly designed and developed to guarantee the maximum installation ease.

WARNING: this kit has been properly tested to guarantee total compatibility with a bike entirely according to the stock one sold by the mother house.

Through the fixing points on the back of the logger the stock dash can be easily and quicly substituted with no need of bending or drilling anything: each component is just "Plug&Play".

The system is to be connected to the high beam chassis using the bracket included in the kit. The bracket is in black anodised aluminium lightweight and mechanically resistant.


GENERAL NOTES – Read these notes before installing the system.

- Do not cut any cable: the wiring supplied with the kit is Plug&Play;
- be careful not to damage the stock connectors while plugging/unplugging them;
- do not install the system when the engine is hot;
- be careful not to lose screws and washers.

2.1 - Installation on Yamaha R1 2007/2008 - R6 2006/2007/2008


Once the stock dash removed:

- fix MXL to the bracket through the four fixing points highlighted in the image here below;
- connect the wiring to the connectors as explained here below.

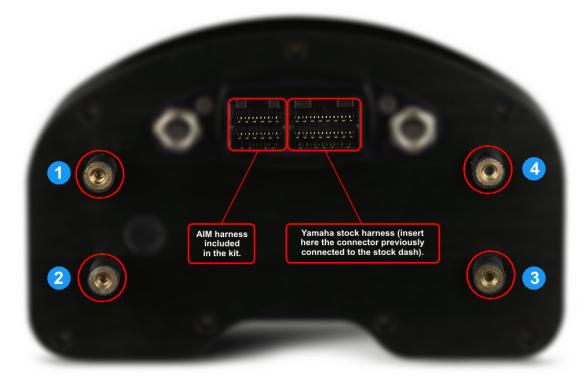



2.2 - Installation on Yamaha R1 2009

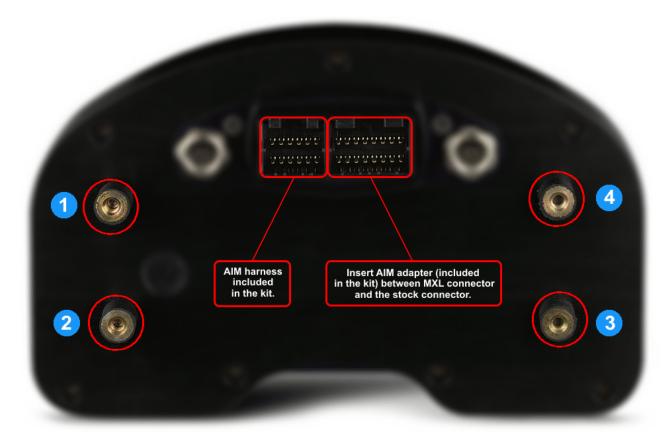

Once the stock dash removed:

- fix MXL to the bracket using the 4 fixing points highlighted here above;
- connect 12 pins AMP connector (on the left in the image here above) to the AMP harness included in the kit;
- insert AIM adapter (included in the kit) between right MXL connector highlighted here above and the stock connector.




Chapter 3 -MXL and Yamaha connectors pinout

Up to 2008 Yamaha bikes used a 16 pins AMP female connector for both R1 and R6 while starting from 2009 Yamaha R1 mounts a 20 pins JAE male connector.

3.1 - MXL & Yamaha R1 2007/08 - R6 2006/07/08 AMP connectors pinout

The image here below shows MXL AMP connectors and their pinout.



	P 12 pins connector A")		P 16 pins connector 3")
1A	Analog input 10	1B	+Vb
2A	(free)	2B	+Vb EXT
3A	+VB	3B	GND
4A	GND	4B	not used
5A	Lap (optical)	5B	not used
6A	+Vref	6B	K-Line
7A	GND	7B	oil level
8A	Analog input 6 (free)	8B	RPM
9A	Analog input 5 (free)	9B	+Vb
10A	Analog input 7 (free)	10B	Hi-beam
11A	Analog input 9 (free)	11B	turning light
12A	+Vref	12B	Fuel
	GND	13B	turning light
		14B	P1
		15B	P2
		16B	Neutral


Here below is shown Yamaha AMP female connector and its wire colours.








3.2 - MXL AMP and Yamaha R1 2009 JAE connectors pinout

To connect Yamaha R1 2009 JAE 20 pins male connector to MXL AMP 16 pins female one it is necessary to use the adapter cable shown here below.









MXL AMP 16 pins female connector pinout

Ί	+VD
2	+Vb EXT
3	GND
4	not used
5	not used
6	K-Line
7	oil level switch
8	RPM
9	+Vb
10	Hi-beam
11	turning light
12	Fuel level alarm
13	turning light
14	P1
15	P2
16	Neutral

Yamaha R1-2009 JAE 20 pins male connector pinout

solder termination view


Not used
Turn left
Not used
Not connected
Oil level switch
RPM
6 th gear
5 th gear
4 th gear
3 rd gear
Hi-beam
Turn right
Vb dir
Vb key
Fuel level alarm
GND
immobilizer led
K line
1 st gear
2 nd gear



Chapter 4 – First start up

MXL for Yamaha R1/R6 can be installed both on a stock bike and on bikes equipped with original YEC (Yamaha Engineering Corporation) kit. Once the bike started, MXL automatically recognizes and shows the kind of ECU installed. ECU MXL can manage:

- Standard ECU (stock ECU): the display shows "ECU MODEL STD" (image below on the left);
- YEC kit (YEC ECU): the display shows "ECU MODEL KIT" (image below on the right).





Shown

Once the ECU identified, MXL shows and manages, as default settings, different information according on MXL model.

MXL STRADA

RPM¹
Rear wheel speed
Water temperature
Air temperature
Oil level
Fuel level alarm
Turning lights
High beam
Engaged gear (Neutral included)
Yamaha error codes

from the ECU from the ECU from the ECU from sensors from sensors from sensors from sensors from sensors automatically calculated from the ECU

Shown
Shown + alarm LED
Shown + alarm LED
Alarm LED
Alarm LED
Alarm LED
Alarm LED
Shown
Availables²

¹ RPM data can be sampled both by the bike ECU and by a stock sensor. To use the data coming from the ECU set "RPM" box in **MXL** system configuration layer on "ECU"; to use the data coming from the stock sensor set "RPM" box in **MXL** system configuration layer on "AIM sensor". Refer to **Race Studio Configuration** user manual for further information concerning MXL configuration. In case a deep analysis of RPM channel is wished use data coming from the stock sensor (set "AIM sensor") whose sampling frequency is higher.

² Yamaha_ERR channel is not shown by the default configuration. To see it on **MXL** display configure the logger using **Race Studio Configuration** software. Refer to **Race Studio Configuration** user manual for further information concerning **MXL** channels configuration.



MXL PISTA

RPM³ from the ECU Shown and recorded from the ECU Shown and recorded Rear wheel speed Water temperature from the ECU Shown and recorded + alarm LED Air temperature from the ECU Shown and recorded + alarm LED Oil level from the sensors Alarm LED Fuel alarm from the sensors Alarm LED Turning lights from the sensors Alarm LED High beam Alarm LED from the sensors

Engaged gear (Neutral included) calculated Shown and recorded Yamaha error codes from the ECU Alarm LED – Availables⁴

_

³ RPM data can be obtained both from the bike ECU and from a stock sensor. To use the data coming from the ECU set "RPM" box in **MXL** system configuration layer on "ECU"; to use the data coming from the stock sensor set "RPM" box in **MXL** system configuration layer on "AIM sensor". Refer to **Race Studio Configuration** user manual for further information concerning MXL configuration. In case a deep analysis of RPM channel is wished use data coming from the stock sensor (set "AIM sensor") whose sampling frequency is higher.

⁴ Yamaha_ERR channel is not shown by the default configuration. To see it on **MXL** display configure the logger using **Race Studio Configuration** software. Refer to **Race Studio Configuration** user manual for further information concerning **MXL** channels configuration.



Chapter 5 – Calibration, gear calculation, data download and analysis

MXL Strada/ Pista can show engaged gear number on the display.

Warning:

- for MXL to correctly show the engaged gear, "Gear calibration procedure" needs to be performed. Refer to MXL user manual to know how to perform it.
- In case crown/pinion ratio is modified new calibration and gear computation are needed.
- Refer to Race Studio Configuration user manual for further information concerning the gear sensor calibration and the gear computation.

MXL can be configured only using a PC and **Race Studio 2** software (included in the kit). To connect **MXL** to the PC use the proper USB cable that comes with the kit.

For any further information concerning **Race Studio 2** software installation and working mode refer to the related user manual.

Once a test session is over it is possible to download data recorded by the logger (MXL Pista only) and save them in a database integrated in Race Studio 2 software.

For further information concerning data download refer to **Race Studio Configuration** user manual.



Chapter 6 – Error codes

Yamaha ECUs offer a diagnostic function of the errors that can occur on the bike. The table here below shows the meaning of the different error codes (YAMAHA_ERR channel):


11	Cam shaft sensor problem
12	Driving shaft sensor problem
13,14,20,23	Air pressure sensor problem
15,16	Throttle position sensor problem
17,18	EXUP engine valve problem
19	Side stand sensor problem
21	Water temperature sensor problem
22	Intake air temperature sensor problem
30,41	Roll over sensor problem
33	Ignition coil #1 problem
34	Ignition coil #2 problem
35	Ignition coil #3 problem
36	Ignition coil #4 problem
42	Speed sensor or neutral (N) switch sensor problem
43,46	Injection system problem
47	EXUP valve position problem
48	EXUP servomotor problem
50	Internal ECU problem

Warning: refer to Yamaha and YEC official documentation for the complete description of the errors.


In case diagnostic function detects more than one error, YAMAHA_ERR channel shows error codes in sequence.



Appendix – Wirings and pinout

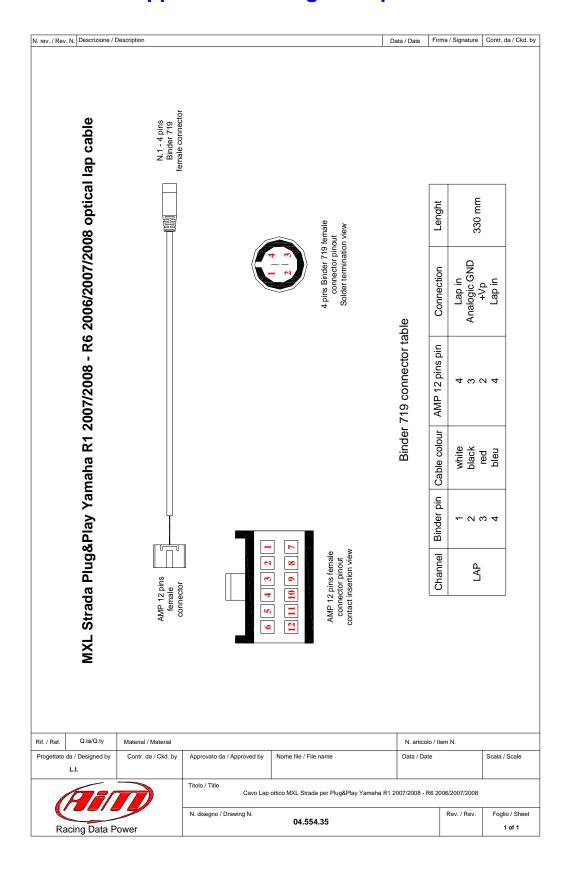



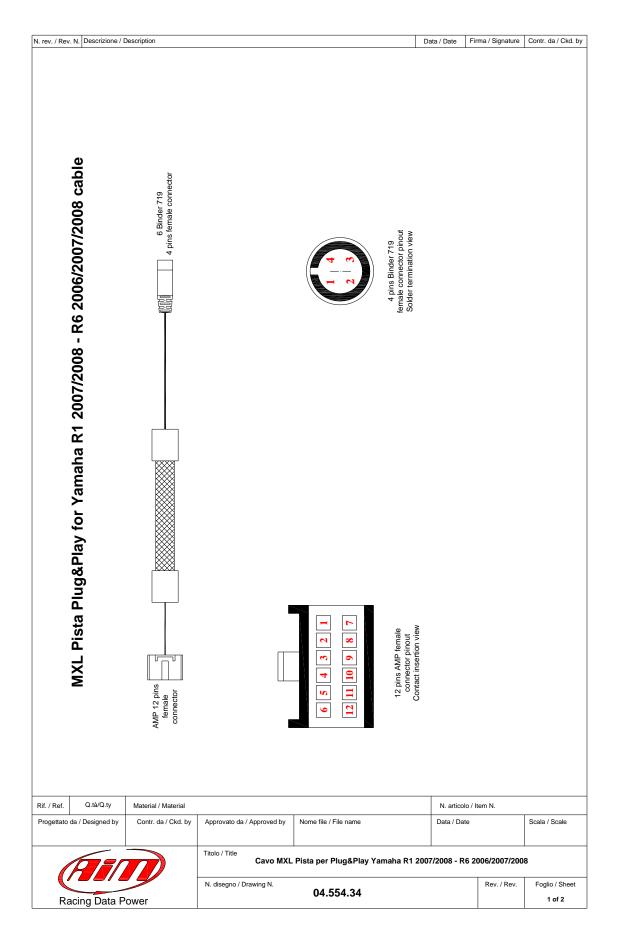



N. rev. / Rev. N.	Descrizione / Description	Data / Date	Firma / Signature	Contr. da / Ckd. by

Binder 719 connector table

Channel	Binder pin	cable colour	AMP 12 pins pin	Connection	Lenght
Ch. 5	1 2 3 4	White black n.c. bleu	8 6 5	Analog input 5 Analog GND V reference 1	330 mm
	1 2	White	7 6	Analog input 6 Analog GND	
Ch. 6	3 4	n.c. bleu	5	V reference 1	330 mm
Ch. 7	1 2 3 4	White black n.c. bleu	9 12 11	Analog input 7 Analog GND V reference 2	380 mm
Ch. 9	1 2 3 4	White black red bleu	10 12 2 11	Analog input 9 Analog GND + VB V reference 2	380 mm
Ch. 10 / Gyro	1 2 3 4	White black red bleu	1 3 2 11	Analog input 10 Analog GND + VB V reference 2	430 mm
Lap	1 2 3 4	White black red bleu	4 3 2 4	Lap in Analog GND + VB Lap in	430 mm

Rif. / Ref.	Q.tà/Q.ty	Material / Material				N. articolo / Item N.		
Progettato	da / Designed by	Contr. da / Ckd. by	Approvato da / Approved by	Nome file / File name	Data / Date		Scala / Scale	
(Alim)			Titolo / Title Cavo MXL	Pista per Plug&Play Yamaha R1 200	7/2008 - R6 2	006/2007/200	8	
Racing Data Power		N. disegno / Drawing N.	04.554.34		Rev. / Rev.	Foglio / Sheet 2 of 2		



