

AiM pressure sensor 0-10 bar

AiM 0-10bar pressure sensor is suitable for oil and fuel pressure reading, being able to read pressures up to 10 bars.

The sensor is sold with three different threads, whose **part number** is:



- 0-10 bar M10 **X05PSA00010B10K**
- 0-10bar 1/8 NPT **X05PSA00010B18K**
- 0-10 bar 3/8 24 **X05PSA00010B38K**




Technical characteristics

Supply	8-16 V
Accuracy	< +/- 0.5% FS (CLNH – combined non-linearity and hysteresis)
Characterisation	500 mV/ 0 bar 4500 mV/ 10 bar
Consumption	< 10 mA
Temperature working range	from -20°C to 135°C
Sealing	IP66
Housing	316 stainless steel
Weight	30 g
Cable length	400 mm
Thread	M10 – 3/8 24 – 1/8 NPT


Drawings and pinout

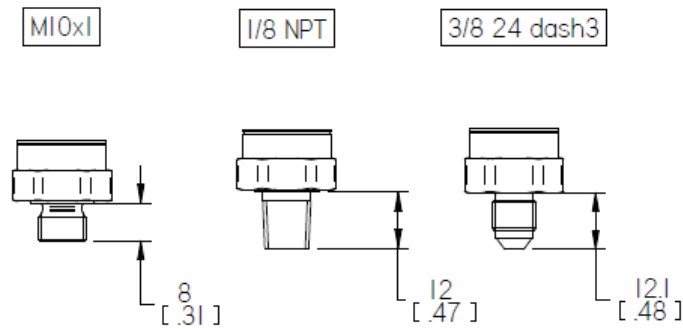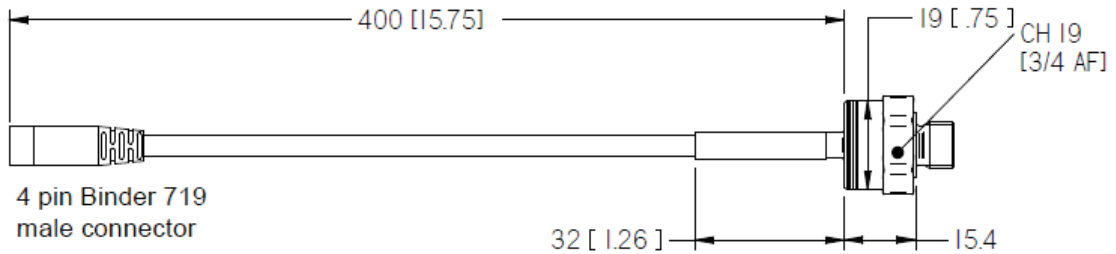

Binder connector – Sensor side

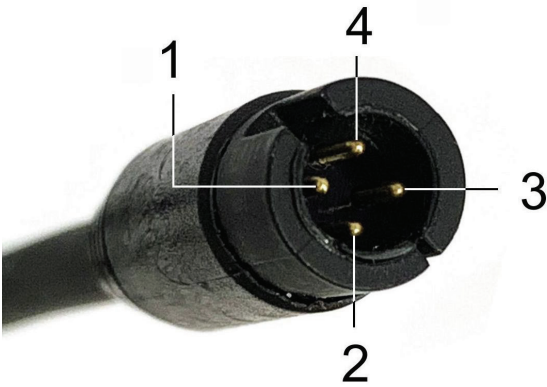

Binder connector – Harness side

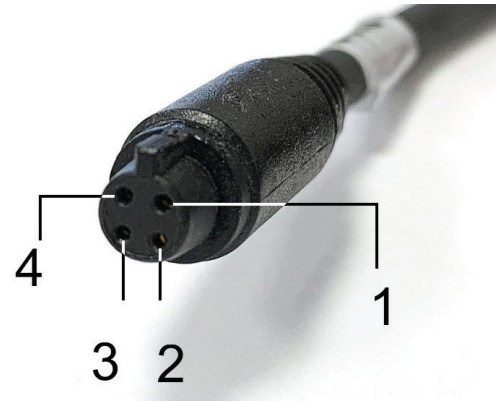

Pin

- 1
- 2
- 3
- 4

Function

- Analog signal
- GND
- +Vb
- Not connected

Cable color

- White
- Black
- Red

Extension cables

For this sensor connection, standard length extension cables are available, whose part number changes according to their length and to the product the sensor is to be connected to.

Extension cable for connection to:

- MXG/MXG 1.2/MXG 1.2 Strada
- MXS/MXS 1.2/MXS Strada/MXS 1.2 Strada
- MXP/MXP Strada
- MXL2
- MXm
- EVO5
- MXL Strada/Pista/Pro05

Part numbers:

- V02PCB05B** - cable length: 500mm
- V02PCB10B** - cable length: 1000mm
- V02PCB15B** - cable length: 1500mm
- V02PCB20B** - cable length: 2000mm
- V02PCB25B** - cable length: 2500mm
- V02PCB30B** - cable length: 3000mm



Extension cable for connection to:

- Channel Expansion
- EVO4
- EVO4S

Part numbers:

- V02PCB05BTXG** - cable length: 500mm
- V02PCB10BTXG** - cable length: 1000mm
- V02PCB15BTXG** - cable length: 1500mm
- V02PCB20BTXG** - cable length: 2000mm
- V02PCB25BTXG** - cable length: 2500mm
- V02PCB30BTXG** - cable length: 3000mm

